


NTM-726
Air-Tight Baffled Lensless Shower Trim

TRIM DIMENSIONS

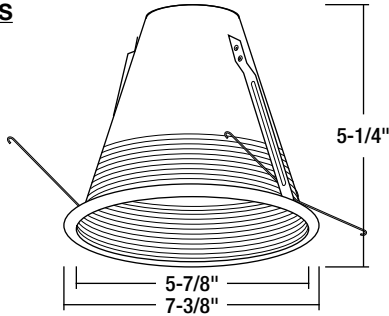

Trim OD: 7-3/8"
 Aperture: 5-7/8"
 Height: 5-1/4"

FEATURES

Trim

Precision spun 0.050 aluminum baffle with deep grooves to reduce aperture glare rated for wet location when used with compatible housings.

Mounting

Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Remove socket from socket plate within housing (if applicable), and mount socket on bracket.

Compatible Housings

Compatible with Line Voltage housings.
 See individual specification sheets for more information.

Lamp

Line Voltage

70W PAR30 Max. (NH-26Q; NH-26QNB; NHIC-17/100DWQA; NHIC-17QAT; NHIC-17QNBAT; NHR-26Q; NHRIC-17QAT; NHRIC-17QAT)

100W PAR38 Max. (NHIC-17/100DWQA; NHIC-17QAT; NHIC-17QNBAT; NHRIC-17QAT; NHRIC-17QNBAT)

150W PAR38 Max. (NH-26Q; NH-26QNB; NHR-26Q)


Labels and Listings

cULus Listed for Wet Location when used with compatible housing.


Type
Project
Catalog No.
Lamp/Wattage

HOUSING DIMENSIONS


NH-26Q / NH-26QNB / NHIC-17QAT / NHIC-17QNBAT

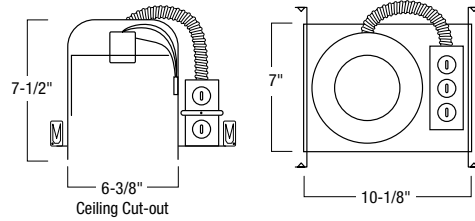

NHIC-17/100DWQA

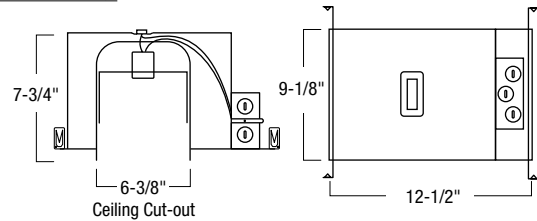

NHR-26Q / NHRIC-17QAT / NHRIC-17QNBAT

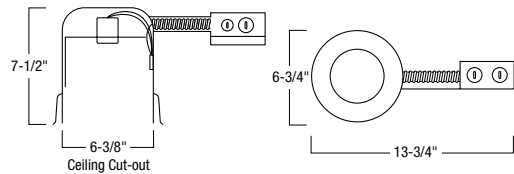

Air-Tight Baffled Lensless Shower Trim

- NTM-726B: Black Air-Tight Baffled Lensless Shower Trim with White Flange
- NTM-726BZ: Bronze Air-Tight Baffled Lensless Shower Trim with Bronze Flange
- NTM-726CO: Copper Air-Tight Baffled Lensless Shower Trim with Copper Flange
- NTM-726N: Natural Metal Air-Tight Baffled Lensless Shower Trim with Natural Metal Flange
- NTM-726W: White Air-Tight Baffled Lensless Shower Trim with White Flange

Compatible Housings

LINE VOLTAGE		
Item Number	Installation Type	Dimensions
NH-26Q	Non-IC New Construction	W: 7" L: 10-1/8" H: 7-1/2"
NH-26QNB	Non-IC New Construction - No Bracket	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-17/100DWQA	IC Double Wall Air-Tight New Construction	W: 9-1/8" L: 12-1/2" H: 7-3/4"
NHIC-17QAT	IC Air-Tight New Construction	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-17QNBAT	IC Air-Tight New Const. - No Bracket	W: 7" L: 10-1/8" H: 7-1/2"
NHR-26Q	Non-IC Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-17QAT	IC Air-Tight Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-17QNBAT	IC Air-Tight Remodel - No Bracket	W: 6-3/4" L: 13-3/4" H: 7-1/2"